


# Fabric specifications Outdoor Tension Lightbox 140

The Outdoor Tension Lightbox 140 requires a non-stretch backlit PVC banner with a round keder on the top side. The remaining sides can be neatly trimmed. The banner is tensioned into the frame using the internal tilt profile. After tensioning, the PVC banner is completely locked in place.

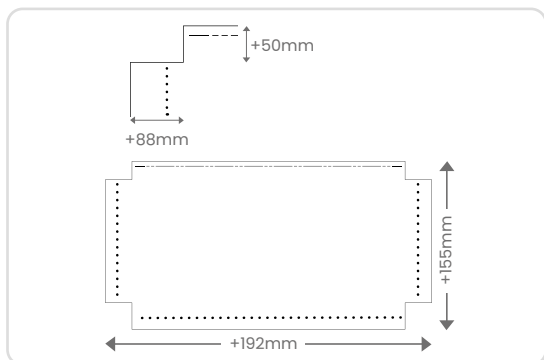

## PVC banner size and cutting instructions

Produce the PVC banner with an overall width of frame +192 mm and an overall height of frame + 155mm.

Cut out the corner sections as shown in the drawing. The top edge must be fitted with a round keder, while the remaining edges should be left plain for installation into the tensioning system.